Switch guards for switch series 5000M - 600H



DISTINCTIVE FEATURES

Modern, patented design Lightweight Anti-tamper wire seal hole as standard



GENERAL SPECIFICATIONS

- APEM SAS patented design
- Operating temperature: -20 °C to +55 °C (-4 °F to +131 °F)
- Storage temperature : -40 °C to +85 °C (-40 °F to +185 °F)
- Switch guards are designed to prevent accidental lever operation on switches with Ø 11.9 (.468) or Ø 12 (.472) threaded bushing and lever length 17.5 (.688) outside bushing.

When the guard is raised, the lever can be operated freely. When the guard is fully depressed, the lever is locked in a stable position.

Please note that these guards are not intended to reset the actuator in the desired position.

For correct switch operation, the switch guard should be adjusted properly (see "Mounting" below).




MATERIALS

- Support plate : thermoplastic
- Cap: thermoplastic



MOUNTING





The company reserves the right to change specifications without notice.







PANEL CUT-OUT


FOR BUSHING WITH KEYWAY



Switch guards for switch series 5000M - 600H



BUILD YOUR PART NUMBER

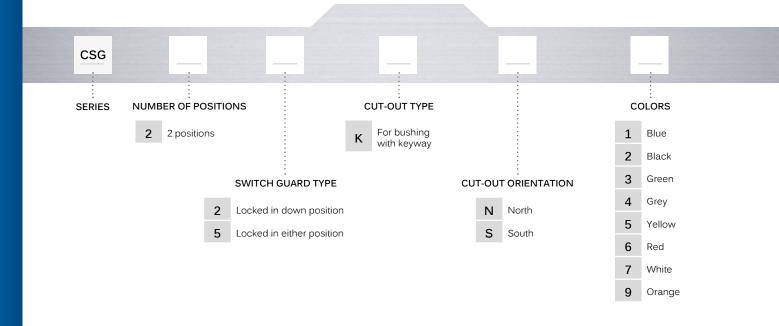




ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers and options in the same order as in above chart.

- Notice: please note that not all combinations of above numbers are available. Refer to the following pages for further information.
- Mounting accessories: supplied with the switch or to order separately (see "Hardware" section of website).

Switch guards for switch series 5000M - 600H

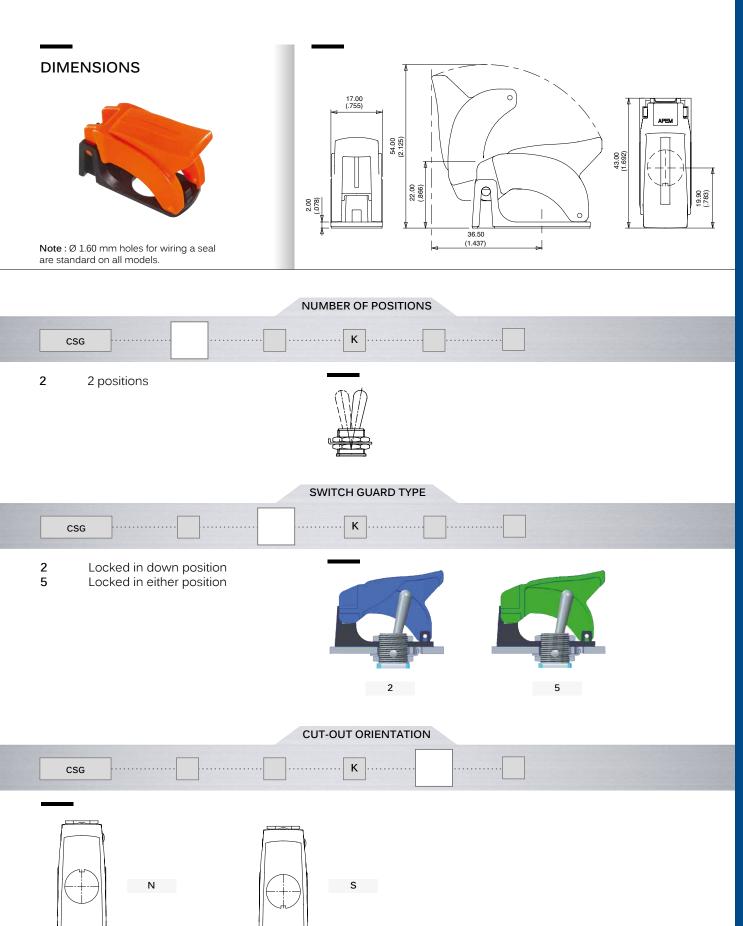

Switch guards for switch series 5000M - 600H

